

## APPLICATIONS

- Aerospace analysis
- Amusement ride testing
- Automotive safety
- Biomechanics
- Helicopter & aircraft
- Impact testing
- Motorsports incident recorder
- Parachute deployment
- Transportation monitoring: truck, air, ship & rail
- Ride & handling
- Sports & safety equipment

# TSR PRO

## Data Logger with Internal Triaxial Accelerometer



The TSR PRO is a compact portable data logger with built-in triaxial accelerometers. Ideal for both short duration tests and long-term monitoring, the TSR PRO time and date stamps each event and stores up to 2,000 events in flash memory.

## Features

- Compact and rugged, the data logger is designed to be mounted on or inside a test article
- Stores up to 2,000 events or 34 hours of continuous recording @ 1K sps; data writes directly to flash memory
- Battery options: Built-in rechargeable (via USB) or user-replaceable AA battery
- Multiple sensor range options:  $\pm 20$ ,  $\pm 50$ , or  $\pm 250$  g
- Variable sampling rates from 1,000 to 20,000 sps/channel
- Logs temperature, date and time for each event
- IP67 rated for dust protection and immersion in water
- Complies with ISO 6487 and SAE J211 recommended practices, as well as NHTSA and FAA requirements
- Intuitive software for arming, downloading and viewing data; simple data files can be viewed in Excel


The TSR PRO is a self-powered data logger with three internal accelerometers. It is ideal for unattended monitoring of acceleration and vibration in harsh test environments. Featuring an advanced sleep mode that helps save battery power, the module “wakes” for an event, which can be triggered by an acceleration threshold, contact closure switch input, or voltage input. After each event, data writes to non-volatile flash memory, the unit automatically re-arms, and is ready to capture the next event. TSR PRO is available with a USB-rechargeable battery or a user-replaceable AA battery.

The interface connector makes it easy to access trigger inputs/outputs, USB, and an external power input option.



## Software

TSR Control software provides easy-to-use tools for test setup and viewing events. With a focus on speed and simplicity, TSR Control lets users configure the recorder, view real-time sensor output and review time-history data.

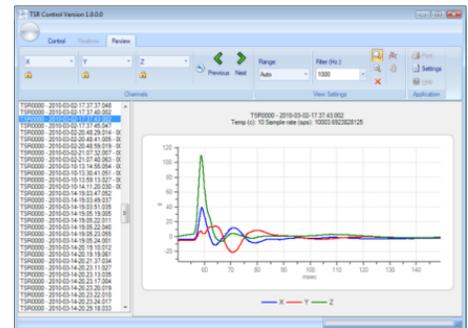

# Specifications

| TSR PRO                |   |
|------------------------|---|
| Internal Accelerometer | MEMS Triaxial (DC response)                             |
| Sensor Range Options   | ±20, ±50 or ±250 g                                      |
| Frequency Response     | DC to 300 Hz<br>4-pole Butterworth<br>SAE/ISO Class 180 |
| Sampling Rate          | 1,000 to 20,000 samples/sec/channel<br>16-bit ADC       |

| POWER – Battery Life Estimate*  |   |
|---|---|
| Active Mode   | System always armed, collects 512 pre-trigger data points |
| Lithium USB-rechargeable (900 mAh)  | 24 hrs**  |
| Lithium non-rechargeable (2400 mAh)   | 72 hrs**  |
| External Battery (via 15-pin D-Sub connector)   | Depends on customer battery size                          |
| * Battery life will vary based on type, application, duty-cycle and sampling rate.<br>** Estimate based on potential low temperature operation and/or older battery (actual may be longer). |   |
| See TSR Battery Life article available on DTS Help Center   |   |

| PHYSICAL            |                                       |
|---------------------|---------------------------------------|
| Size:               | 72 x 72 x 22 mm (2.83 x 2.83 x 0.87") |
| Mass:               | 237 g (8.37 oz)                       |
| Enclosure Material: | Anodized Aluminum                     |

| ENVIRONMENTAL          |  |
|------------------------|--|
| Operating Temperature: | -20 to 60°C (Rechargeable)<br>-20 to 85°C (Non-Rechargeable) |
| Humidity:              | 95% RH non-condensing  |
| Shock:                 | 500 g operating; 2000 g survivable                           |
| IP Rating:             | IP67   |

| MEASUREMENT CHANNEL OVERVIEW |  |
|------------------------------|--|
| Sensors:                     | Three MEMS DC response accelerometers        |
| Filters:                     | 4-pole Butterworth                           |
| Data Conversion:             | 16-bit ADC, one per channel                  |
| Sampling Rate:               | 1,000 to 20,000 samples per sec. per channel |
| Pre-Trigger Data:            | 512 samples available                        |
| Memory:                      | 1 GB direct-write flash                      |

| POWER SAVING FEATURES (Software Enabled) |  |
|--|--|
| Motion Sense:                            | Detects slight movement to bring unit from deep sleep to ready mode.   |
| Magnet Detect:                           | Hall-effect sensor can be used to bring unit in/out of deep sleep when magnet is present   |
| Max Battery Life:                        | Depends on application, duty cycle and use of power saving features. Operational life can be greatly extended by using external power. |

| TRIGGERING               |  |                                  |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
|--------------------------|--|----------------------------------|--------------------------|----------------------------------|----|----|--------------|----|----|--------------|-----|-----|-----------|-----|-----|------------|
| Software Trigger:        | Level triggering on each axis  |                                  |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
|                          | <table border="1"> <thead> <tr> <th>TSR g Range ±</th> <th>Approx. Actual g Range ±</th> <th>Programmable Level Trigger Range</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>35</td> <td>±0.7 &lt;&gt; ±3.5</td> </tr> <tr> <td>50</td> <td>70</td> <td>±1.4 &lt;&gt; ±7.0</td> </tr> <tr> <td>250</td> <td>350</td> <td>±7 &lt;&gt; ±35</td> </tr> <tr> <td>500</td> <td>700</td> <td>±14 &lt;&gt; ±70</td> </tr> </tbody> </table> | TSR g Range ±                    | Approx. Actual g Range ± | Programmable Level Trigger Range | 20 | 35 | ±0.7 <> ±3.5 | 50 | 70 | ±1.4 <> ±7.0 | 250 | 350 | ±7 <> ±35 | 500 | 700 | ±14 <> ±70 |
| TSR g Range ±            | Approx. Actual g Range ±   | Programmable Level Trigger Range |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
| 20                       | 35   | ±0.7 <> ±3.5                     |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
| 50                       | 70   | ±1.4 <> ±7.0                     |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
| 250                      | 350  | ±7 <> ±35                        |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
| 500                      | 700  | ±14 <> ±70                       |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |
| Hardware Trigger Status: | Contact closure or isolated voltage input<br>Voltage or contact-closure output   |                                  |                          |                                  |    |    |              |    |    |              |     |     |           |     |     |            |

| POWER            |   |
|------------------|---|
| External:        | 6-36 VDC                                  |
| Battery Options: | USB-rechargeable -or-<br>Non-rechargeable |

| CALIBRATION           |  |
|-----------------------|--|
| Calibration Supplied: | ISO/IEC 17025 (Accredited), Measurements traceable to SI |
| Service Options:      | OEM, On-site, and Service Contracts available            |

| SOFTWARE           |   |
|--------------------|---|
| Product Name:      | TSR Control   |
| Data Management:   | Date/Time/Temp recorded for each event                                |
| Post-Processing:   | SAE Filters, view multiple channels/tests, Head Injury Criteria (HIC) |
| Operating Systems: | Windows® 10/11 (32/64-bit)  |
| Communication:     | USB   |

## CONTACT US

Phone: +1 562 493 0158  
Email: sales@dtsweb.com  
Web: www.dtsweb.com

The document and the products described herein are subject to change from time to time without notice and are also subject to specific disclaimers. Please visit <https://vpgsensors.com/disclaimer> for more information.  
© 2025 VPG - All Rights Reserved



Specifications subject to change without notice.  
© Diversified Technical Systems, Inc.